(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 3 July 2003 (03.07.2003)

PCT

(16) International Publication Number WO 03/053735 Al

- (51) International Patent Classification?: B64D 11/06

B60N 2/01,

- (74) Agent: WALLACE, Alan, FR Kelly & Co. 9 University Street, Belfast BT7 1FY (GB)
- PCT/EP02/14873 (21) International Application Number:
- (22) International Filing Date:

19 December 2002 (19.12.2002)

(25) Filing Lunguage:

0208917.5

English


(26) Publication Language:

English

- (30) Priority Dutus 0130442.7
 - GB 20 December 2001 (20.12.2001) 19 April 2002 (19.04.2002)
- (71) Applicant and (72) Inventor: THOMPSON, James [GB/GB], 18 Glenloughan Road, Kilkeel, County Down BT34 4SR (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, 1P, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH. GM. KE, LS, MW. MZ, SD, SL, SZ, YZ, UG, ZM, ZW), Eurasian patent (AM, AZ, SY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR). OAPI patent (BF, BJ, CP, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SEATING FOR A VEHICLE

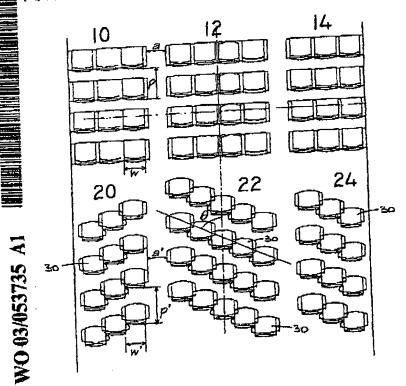

(57) Abstract: A scanng arrangement for a vehicle, especially an arreraft, in which seats are arranged in a plurality of generally parallel ranks (20, 22, 24), each rank extending in a fore-and-aft direction, and in a plarality of rows, each row extending at an angle other than a right angle with respect to said fore-and-aft direction and wherein adjacent scars (30) in a row overlap in a transverse direction in the preferred embodument, the seats of a row also overlap in said fore-and-aft direction and include a nuncated armiest (34) at one side of the seat arranged to fit behing an adjacent seat. The sears further include an armrest (32) at the other side of the seat, the armest comprising a bar which extends from the roar of the seat so that a portion of one sent is located beneath the armiest provided at said other side of an adjacent seat.

PAGE 49/74 * RCVD AT 12/3/2004 2:15:16 PM [Eastern Standard Time] * SVR:USPTO-EFXRF-2/1 * DNIS:7466630 * CSID:+2272100 * DURATION (mm-ss):21-36